



Flight Light Inc.
2708 47th Ave.
Sacramento, California, U.S.A.
95822-3806



+1.800.806.3548
+1.916.394.2800

www.flightlight.com
sales@flightlight.com

Surface Floodlight Model 701

Compliance


- FAA AC150/5390-2B
- ICAO Annex 14, Volume II

Applications

The Model 701 is used as an independent floodlight. It may be installed on the heliport surface, on a pedestal or fence post. The wide beams are aimed to uniformly illuminate a 100° spread and reflect the surface of the landing area without glare. The overall height is only 9.5 inches.

Specifications

Case: Heavy Cast Aluminum
Flood lamps(2): Par 46, 150 Watt Sealed Beam
Power: 120 VAC, or other
Dimensions:
Height: 9.5 Inches
Width: 19 Inches
Length: 19 Inches
Weight: 38 pounds
Finish: Polyester Powder Coating

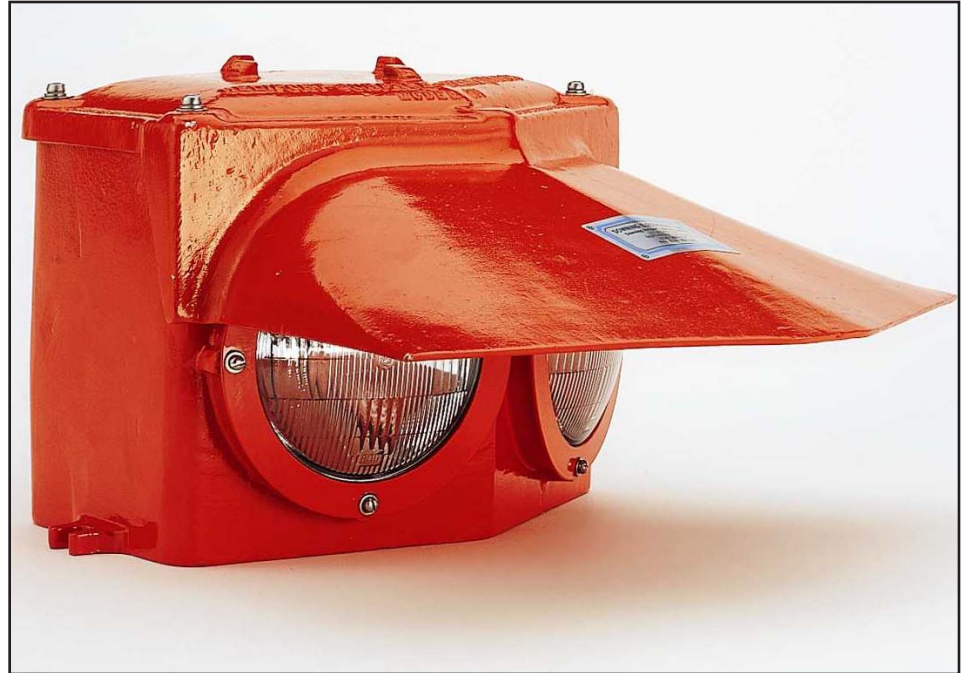

Surface Floodlight ~ Model 701

Please Note: All customers ordering floodlighting should be aware of the following: When installed on some types of heliports, you should follow the recommendations of the ICAO Heliport Manual 9261-AN/903. The floodlighting should be mounted outside the boundary of the TLOF (landing surface) such that the highest point on the installed light is not more than 10 inches (25 cm) above the level of the TLOF. Please be informed of these guidelines. With the release of FAA Advisory Circular 150-5390-2B; it recommends for heliport installations in the United States, there be no equipment or structures within the boundary of the Safety Area greater than 2 inches above the level of the TLOF (landing surface) with one exception: a perimeter light no higher than 8 inches above the level of the TLOF is allowed in the Safety Area.

Visit our web site: www.flightlight.com